

# Anti-sparking front wall for SBA-F-V desks

🔗 Sectors

🔗 Applications **Fix**

🔗 Issues **Fumes**

COD: PFASBAFV0000000


Anti-rebound suction front wall for grinding on SBA, SBF and SBV benches.

## Insight


Adequate thickness of anti-rebound wire mesh panel to stop sparks and any grinding chips from bouncing off the operator.

Easily disassembled for maintenance and cleaning.

Compatible with suction benches SBA , SBF , SBV.

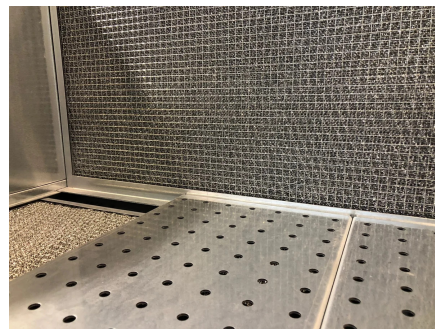

## Photogallery

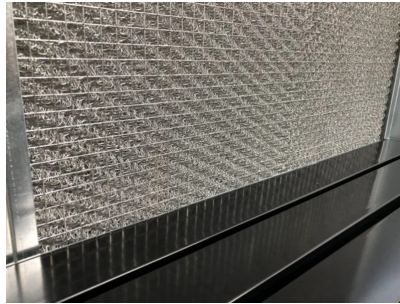

## Related Products



### SBA suction bench for centralised systems

SBA000000000000

The **SBA suction bench** is the ideal solution for vacuuming up fumes and dust and **working safely** when welding, deburring, sanding or grinding metals. In fact, the practical and sturdy suction bench top ensures **widespread suction on the work surface** and frontally, protecting the operator's respiratory tract.



### SBF suction bench with integrated filters

SBF000000000000

The **SBF suction bench** is to be used to suck in fumes and dust during welding, deburring, sanding or grinding operations on metals and in all areas where surface treatments with dry abrasives are carried out.



### SBV suction bench with integrated fan and filters

SBV000000000000

The **SBV extraction bench** is designed to protect the operator from fumes and volatile dust emitted by professional processes such as welding, deburring, sanding, or grinding metals in the metalworking industry, foundries, and all sectors where surface treatments are carried out with dry abrasives. It is also used for cleaning parts or blowing off dust from components.

The **extraction bench is ready for use**, with no need for external fans, filters, or electrical connections, as the on/off switch is already equipped with a three-phase plug.

The basic version of the bench, as shown in the price list below, comes complete with a worktop, suction front, magnetothermal on/off switch wired to the motor, and adjustable feet.

