

# FRV wall-mounted smoke extractor with Superflex™ arm and fan



🔗 Sectors [Welding](#),

🔗 Applications [Fix](#)

🔗 Issues [Fumes](#)

COD: FRV000000000000

The **FRV arm-mounted wall-mounted fume extract** or is the ideal solution for effectively and closely extracting welding fumes as required by regulations.

Simple to install on the wall or column, it comes in a kit complete with everything needed.

## Insight

The **FRV wall-mounted fume extractor with arm** is easy to use and increases productivity by reducing work cycles. The extraction arm remains suspended without the need for additional supports, allowing the operator to move and position it effectively without wasting time.

The working radius is 3 or 4 meters depending on the model.

**Flow rate:** 1500 m<sup>3</sup>/h

**Motor:** 1500 W - 220V/1f/50Hz

**Installation:** wall-mounted

**Extractor:** YES / to be connected to a circular section exhaust pipe

**Operating temperature:** from -20°C to +70°C

**Maximum vacuum:** 1600 Pa

### Structure

- Self-supporting structure designed to last over time and ensure maximum maneuverability while maintaining perfect balance.
- Black flexible suction hose made of special reinforced PVC and high temperature resistant steel, easy to replace.
- Truncated cone-shaped suction hood with rectangular base, made of plastic. The screen limits the suction area, significantly increasing its effectiveness. Complete with handle and, on request, adjustment damper.
- Sturdy welded and painted steel bracket for wall or column mounting of the suction arm and fan.
- High-performance centrifugal fan already mounted on the shelf, directly coupled to a 1.5 kW single-phase 220/1/50 electric motor.





## Technical Data

Code	Power W	Nominal flow rate m <sup>3</sup> / h	Useful pressure Pa	Operating temperature °C	Long arm meters	Aspirator	Installation
FRV300000000000	1500 W 220/1/50	1500	1600	From -20°C to +70°C	3	YES / to be connected to drainage pipe with circular cross section	A parete
FRV400000000000	1500 W 220/1/50	1500	1600	From -20°C to +70°C	4	YES / to be connected to drainage pipe with circular cross section	A parete



## Photogallery

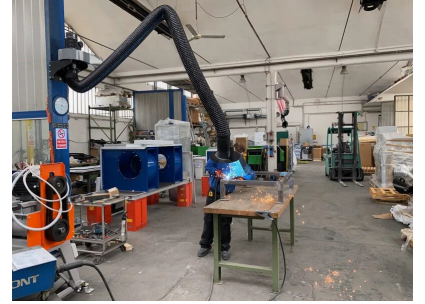

## Related spare parts



### Wall bracket for industrial extraction arm Black

Professional wall bracket for industrial suction arms.

