


# IPE/HEA/HEB beam fastening kit

COD: KITIPEHEAHEB000

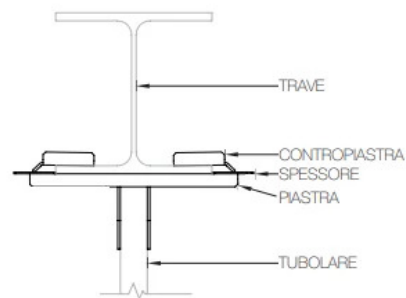

Fastening kit for SMHS fans in HVLS version compatible with most popular IPE, HEA, HEB steel profiles.


## Detailed description

Fastening kit for SMHS fans in HVLS version compatible with most popular IPE, HEA, HEB steel profiles. Supplied with fixing screws.



## Photogallery

Modello	Gamma
IPE	da IPE180 a IPE600
HEA	da HEA100 a HEA400
HEB	da HEB100 a HEB300

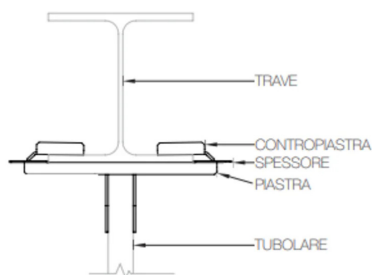

## Spare parts



### HVLS APBG5 industrial 5-blade ceiling fan

SMHS000000000000

APBG5 5-Blade Industrial Ceiling Fan

- 5 Blades Extruded Aluminum Anodized Against Corrosion Constant Section
- Increased Air Distribution Cone
- Three-phase Brushless EC motor equipped with Integrated Electronic System and EMC filters
- 3 Sizes with Diameters 3.6m / 5.4m / 7.3m
- Air Flow Rates up to 438,818 m<sup>3</sup>/h (AMCA230-99)
- 110 RPM Max
- Pot. Max Ass. 0.75 kW



### HVLS APBG5S industrial 5-blade ceiling fan

SWHS000000000000

HVLS APBG5S industrial 5-Blade Ceiling Fan

- 5 Blades Extruded Aluminum Shaped Profile
- Narrow Cone Air Distribution
- Three-phase Brushless EC motor equipped with Integrated Electronic System and EMC filters 3
- Sizes with Diameters 4m / 5m / 6m
- Air Flow Rates up to 529,464 m<sup>3</sup>/h (AMCA230-99)
- 120 RPM Max
- Pot. Max Ass. 1.4 kW
- Suitable for continuous duty S1



### HVLS3 industrial 3-blade ceiling fan

SLHS000000000000

HVLS 3-Blade Industrial Ceiling Fans.

- 3 Blades Extruded in Anodized Aluminum against Corrosion with Constant Cross Section
- Precabled 3-phase Brushless EC motor equipped with Integrated Electronic System and EMC3 filters
- Sizes with Diameters 2.4m / 3m / 3.6m
- Air Flow Rates up to 134,271 m<sup>3</sup>/h (AMCA230-99)200
- Max RPM
- Pot. Max Ass. 0.7 kW
- Suitable for continuous duty S1.

